


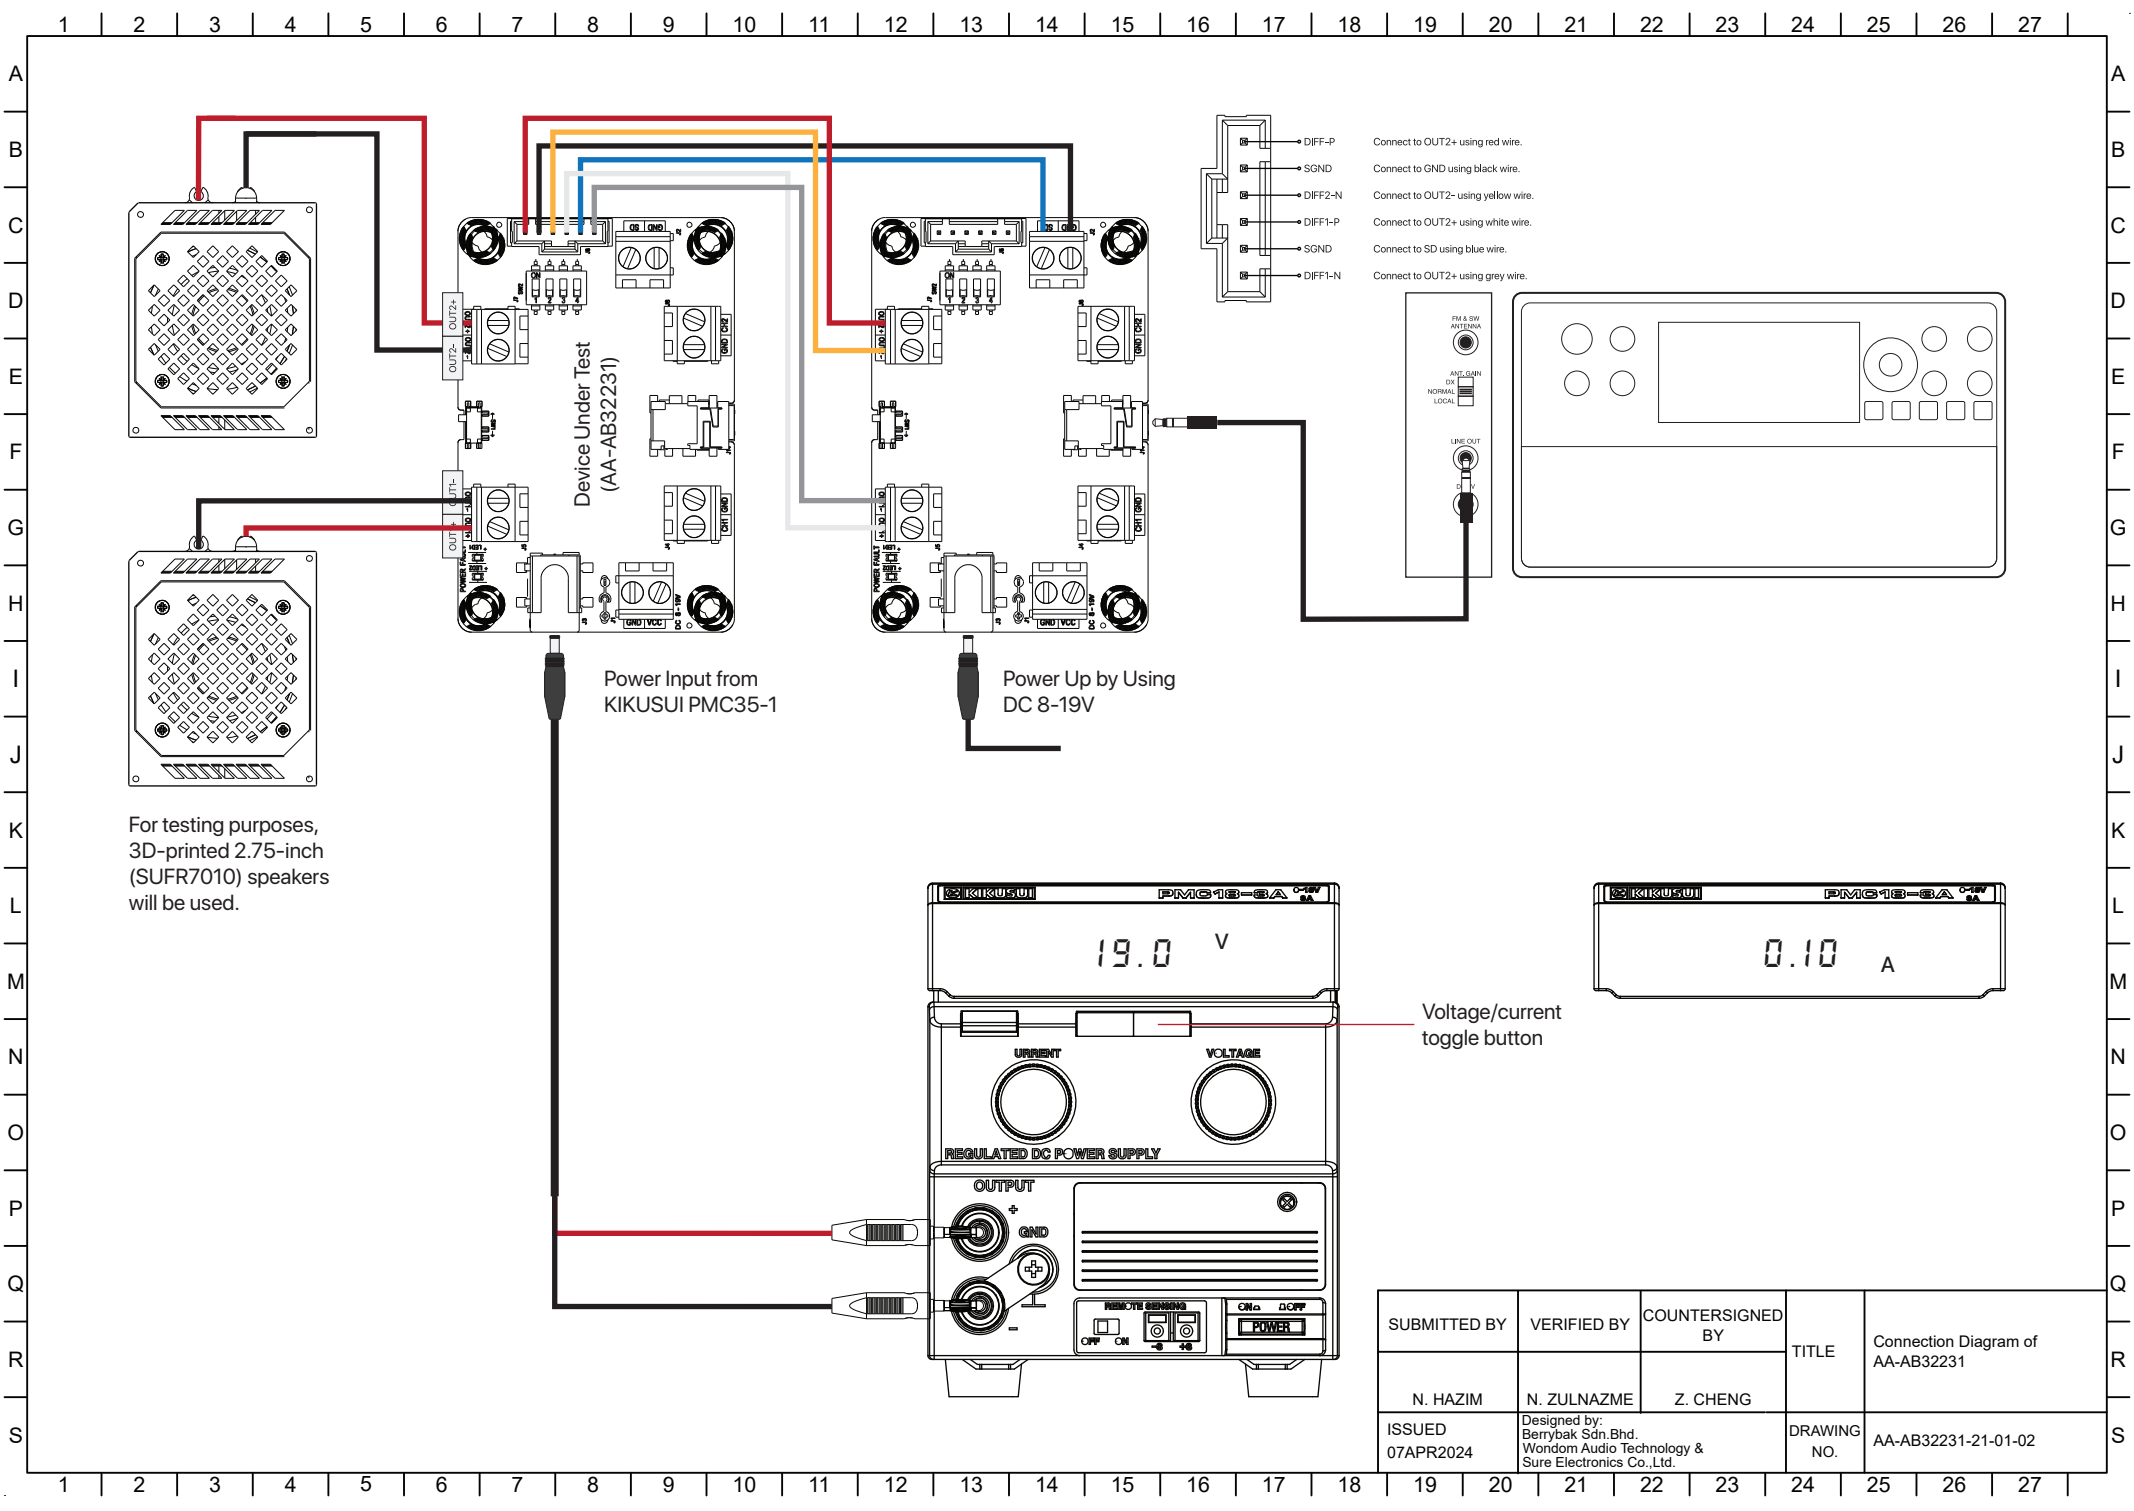





For testing purposes,
3D-printed 2.75-inch
(SUFR7010) speakers
will be used.

Power Input from
KIKUSUI PMC35-1

Power Up by Using
DC 8-19V

Device Under Test
(AA-AB32231)

- Connect to OUT2+ using red wire.
- Connect to GND using black wire.
- Connect to OUT2- using yellow wire.
- Connect to OUT2+ using white wire.
- Connect to SD using blue wire.
- Connect to OUT2+ using grey wire.

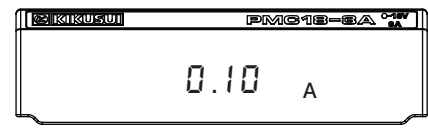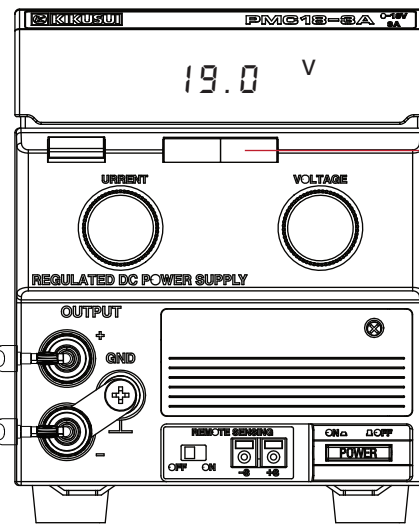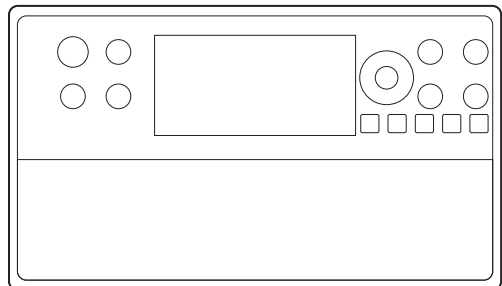

Voltage/current
toggle button

SUBMITTED BY	VERIFIED BY	COUNTERSIGNED BY	TITLE	
N. HAZIM	N. ZULNAZME	Z. CHENG	Connection Diagram of AA-AB32231	
ISSUED 07APR2024	Designed by: Berrybak Sdn.Bhd. Wondom Audio Technology & Sure Electronics Co.,Ltd.	DRAWING NO.	AA-AB32231-21-01-02	